


ICS BLOCK TOP VIEW

48`` Fire Pit

(omit all non corner blocks on both 36`` and 28`` Fire pits)

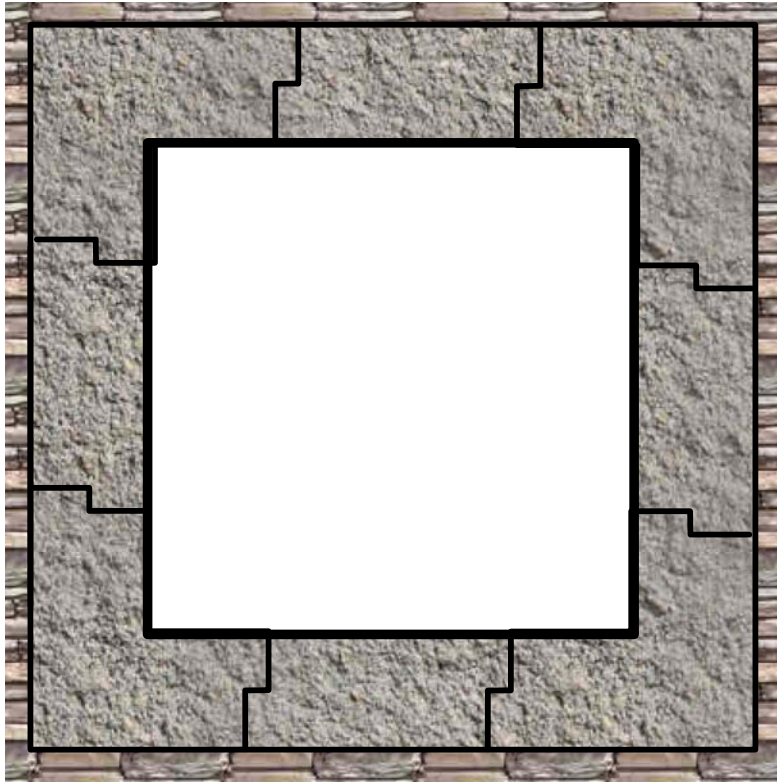

Outside Corner



Inside Corner



ICS Fire Pit Instructions

- * Find a place where you would like to set your fire pit.
- * Take a tape measure and measure a square 48``, 36``, or 28`` on all sides (your dimension will depend on the size of your fire pit).
- * Once you have your fire pit measured set your first course making sure your fire pit is both square and level.. Run your 60`` hose regulator under the first course of blocks. Each side of the fire pit has a notch on the bottom course for you to run your hose through.
- * Dry stack your remaining courses and set your aluminum tray on top of your top course of blocks. Alternating inside corner and outside corner for each course. Creating an interlocking mortar-less structure.
- *Connect your 24`` hose to the bottom of your burner bowl.. Check all connections to make sure they are tight. Set your cap/caps on your top course of blocks making sure it is level.
- *Pour your sub base onto the aluminum tray and into the burner bowl making sure that the surface is flat and the aluminum is completely covered. Never place more than one 1`` of sub base above the aluminum tray. If using glass, level the glass over the sub base until you can no longer see your sub base. When using logs or fire balls arrange your product as desired over the burners to create a natural look.
- *To light turn the key lock valve to the on position and hold a match stick lighter over the burner until it ignites. Adjust your key valve to reach your desired flame height.

WARNING: ICS is not responsible for any accidents that result from installations performed by non licensed gas specialist